


Fan Coil Unit 1

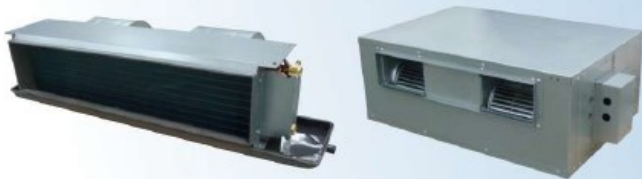


WIBXE-18SVS2
WIBXE-24SVS2
WIBXE-36SVS2
WIBXE-48SVS2
WIBXE-60SVS2

WIDXE-24SVS2
WIDXE-30SVS2
WIDXE-36SVS2
WIDXE-48SVS2
WIDXE-60SVS2

FCU 1-Uncased

SPECIFICATIONS: AIR CONDITIONING



Model Number	Indoor	WIBXE-18SVS2	WIBXE-24SVS2	WIBXE-36SVS2	WIBXE-48SVS2	WIBXE-60SVS2
Nominal Capacity	Cooling	Btu/h	18000	24000	36000	48000
Power Supply	V / Ph / Hz	220 - 240 Volts / 1 Ph / 50-60 Hz				
Rated Load Current	Amps.	0.70	0.99	1.76	2.60	4.10
External Static Pressure	Pa	50	50	50	70	70
Airflow @ rated Pa	CFM	620	830	1150	1550	2070
Sound Level	dB (A)	40	40	45	45	45
Refrigerant	Type	R-22 / R-410A				
Piping Connection	Liquid	Inch	3/8	3/8	3/8	3/8
	Suction	Inch	5/8	5/8	3/4	3/4
Drain Connection	Inch	3/4				
Dimension (W x H x D)	Height	MM	285	285	336	438
	Width	MM	1045	1130	1130	1232
	Depth	MM	500	500	500	523
Weight	Net	Kg	18	21	28	39
	Shipping	Kg	19	23	30	42

OPTIONS: 1. Heat Pump Model 2. Return Plenum with Filter 3. Chilled Water Coil

FCU 1-Cased

SPECIFICATIONS: AIR CONDITIONING



Model Number	Indoor	WIDXE-24SVS2	WIDXE-30SVS2	WIDXE-36SVS2	WIDXE-48SVS2	WIDXE-60SVS2
Nominal Capacity	Cooling	Btu/h	24000	30000	36000	48000
Power Supply	V / Ph / Hz	220 - 240 Volts / 1 Ph / 50-60 Hz				
Fan Motor	HP	1/6	1/4	1/4	1/3	3/4
External Static Pressure	Pa	70	70	70	100	100
Airflow @ rated Pa	CFM	800	1000	1200	1600	2000
Refrigerant	Type	R-22 / R-410A				
Piping Connection	Liquid	Inch	3/8	3/8	3/8	3/8
	Suction	Inch	5/8	5/8	3/4	3/4
Drain Connection	Inch	3/4				
Dimension (W x H x D)	Height	MM	310	325	325	350
	Width	MM	900	966	966	1105
	Depth	MM	567	620	620	620
Weight	Net	Kg	39	49	49	55
	Shipping	Kg	42	52	52	58

OPTIONS: 1. Heat Pump Model 2. Chilled Water Coil



Eficiencia21
Especialistas en Alta Eficiencia

Cra. 41 # 69D - 83 L-14 - Barranquilla-Colombia
 Tel: 3603920 - 3686985 - Cel. 3188274604
 eficiencia21@gmail.com - info@eficiencia21.com
 www.eficiencia21.com